


PLISSÉ SLIM®

GLASS-MOUNTED PLEATED BLIND
MAXIMUM DIMENSIONS - W 110 X H280 cm
MINIMUM DIMENSIONS - W 30 X H 30 cm

STANDARD FEATURES

SUPPORT: Aluminium profile and PVC accessories, profile fixing with high-strength double-sided adhesive tape.
OPERATION: Manual operation and/or with rod, optional.

INSTALLATION ON FIXED GLAZING AND WINDOW FRAMES

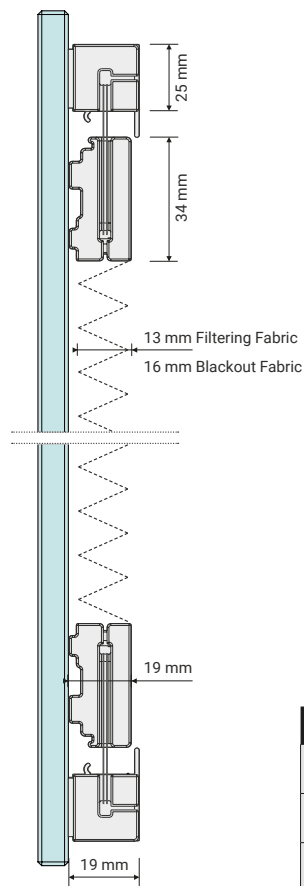

ROD HEIGHT	PRICE
H 60 CM	ON REQUEST
H 90 CM	ON REQUEST
H 120 CM	ON REQUEST

SIDE VIEW

Glass-mounted attachment with high-strength double-sided adhesive tape.

ROD HEIGHT

Operating rod available in WHITE only.


AVAILABLE FABRICS AND PRICES

FABRICS	PRICE	MBQ
DUTCH/ PARROT	ON REQUEST	1,3
LUCIDIUM	ON REQUEST	1,3
BLACK-OUT	ON REQUEST	1,3

MBQ = Minimum Billable Quantity





AVAILABLE FINISHES

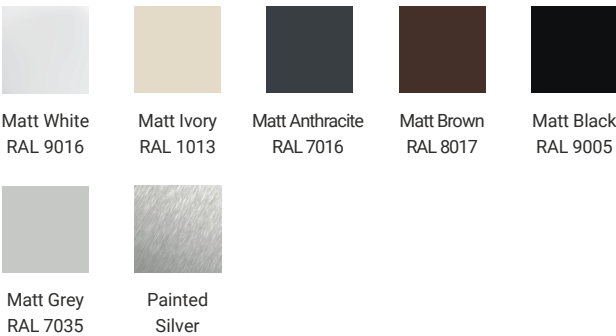

PLISSÉ SLIM® | HOW TO TAKE MEASUREMENTS

INSTALLATION ON FIXED GLAZING

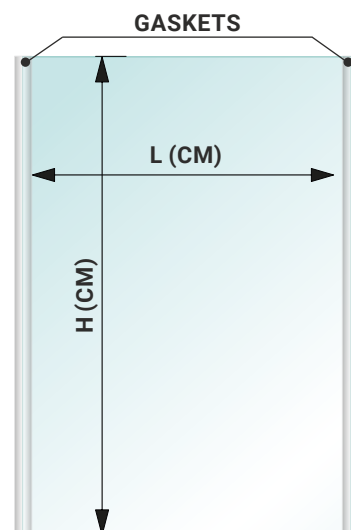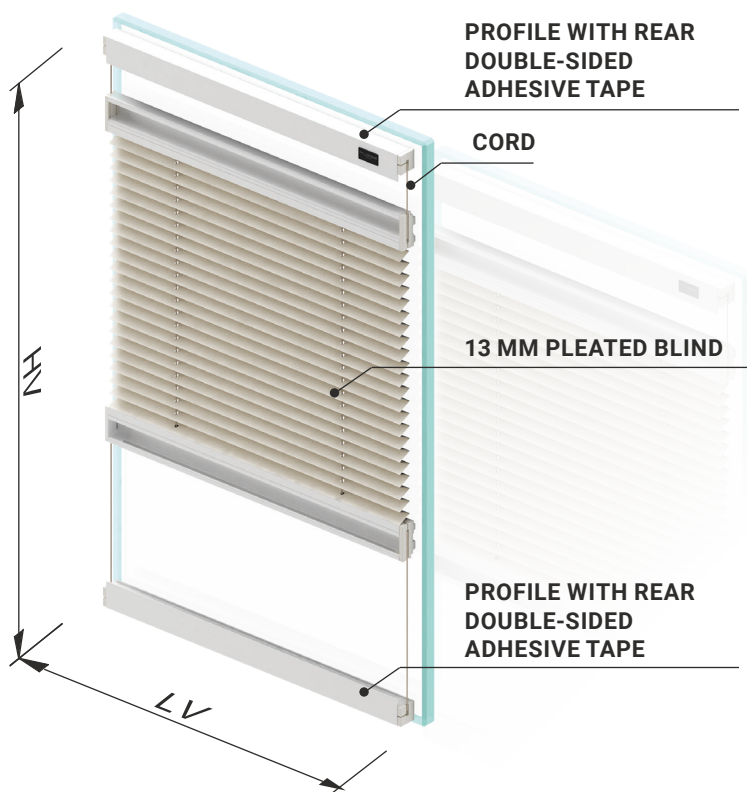


GLASS MEASUREMENTS

L = Width from gasket to gasket

H = Height of the glass

INSTALLATION ON WINDOW SASH

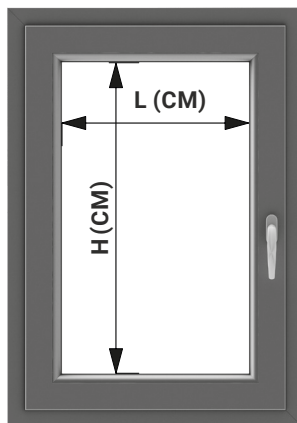

WINDOW MEASUREMENTS

L = Width from gasket to gasket

H = Height from gasket to gasket

IMPORTANT INSTALLATION NOTES

- STEP 1** Make sure there are no silicone residues or other imperfections on the glass.
- STEP 2** Before installing the two profiles, clean the glass thoroughly using the cloth supplied.
- STEP 3** Install the two profiles and wait 20 minutes.
- STEP 4** Install the system following the instructions provided in the instruction sheet supplied with the blind.

IMPORTANT NOTES

WE DO NOT GUARANTEE ADHESION TO THE GLASS IN THE CASE OF SATIN-FINISHED GLASS, GLASS WITH FILMS, OR PROCESSED/TEXTURED GLASS, WHERE ADHESION MAY BE POOR.

QR-CODE

SCAN AND DOWNLOAD THE INSTALLATION INSTRUCTIONS.

