


VERTICAL BLINDS

VERTICAL BAND BLIND WITH 89 AND 127 MM BANDS

MAXIMUM DIMENSIONS - W 580 X H350 cm

MINIMUM WIDTH - 40 cm

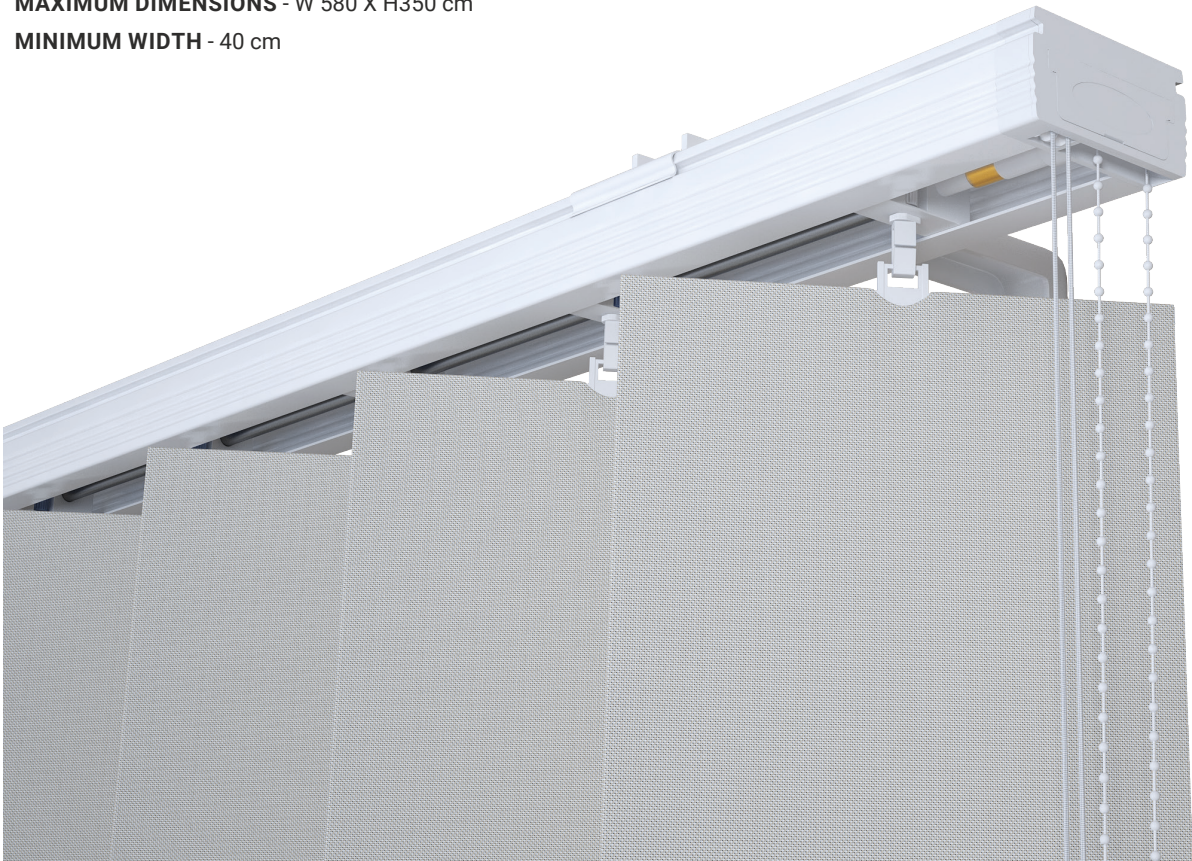

STANDARD FEATURES


PROFILE: 6060 aluminium alloy.

ACCESSORIES: 100% polyester chain with internal core in cord and chain connectors only.


OPERATION: Cord-operated, with rod or motorised.

STACKING TYPE: Standard, on the operating side. On request, surcharge applies for stacking on the opposite side or for two-way stacking.

CEILING AND/OR WALL MOUNTING



SIDE VIEW
Ceiling mounting
STANDARD

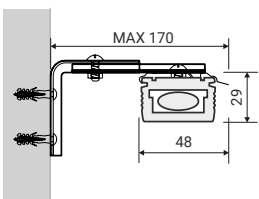

SIDE VIEW
Wall mounting
OPTIONAL

NOTES

- Minimum billable height: 2.00 m.
- Minimum total billable area: 2.50 sqm.
- Wall plugs and screws not included.
- In the presence of major differences in height from the top of the cords, these must be specified in the order form.

AVAILABLE FINISHES



White
RAL 9010




Black
RAL 9005




Satin
Aluminium

OPENING TYPES




LEFT SIDE OPENING - STANDARD
Blind stacks on the operating side.





RIGHT SIDE OPENING - ON REQUEST
Blind stacks on the opposite side to the operation.


STACKING DIMENSIONS



STACKING DIMENSIONS (MEASURE IN CM)						
Width LX	100	200	300	400	500	600
Width LY	8	16	24	32	40	48



STACKING DIMENSIONS (MEASURE IN CM)						
Width LX	100	200	300	400	500	600
Width LY	4	8	12	16	20	24



CONTROL HEIGHTS - CORDS (CM)	
From 40 to 260	10 cm from the floor
Over 260	100 cm from the floor