

BLISH | TECHNICAL FEATURES


BLISH




VERSION WITH OPERATION

CORD AND CHAIN

The chain makes it possible to orient the vertical bands, adjusting the passage of filtering or screening light. The cord controls the opening and closing of the blind.



CORD
Opens and closes the blind.




CHAIN
Moves the vertical bands.

VERSION WITH OPERATION


ROD - OPERATED

The horizontal movement of the rod allows the blind to be opened and closed, while rotating the handle makes it possible to orient the vertical bands and regulate the light. The rod is available in white, grey and black.

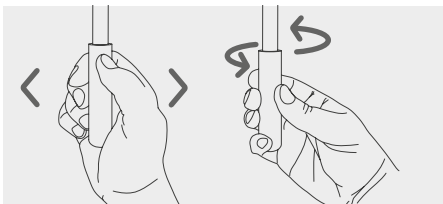

OPERATING ROD
Horizontal movement: opens and closes the blind.
Vertical rotation: moves the vertical bands.


BLISH SP

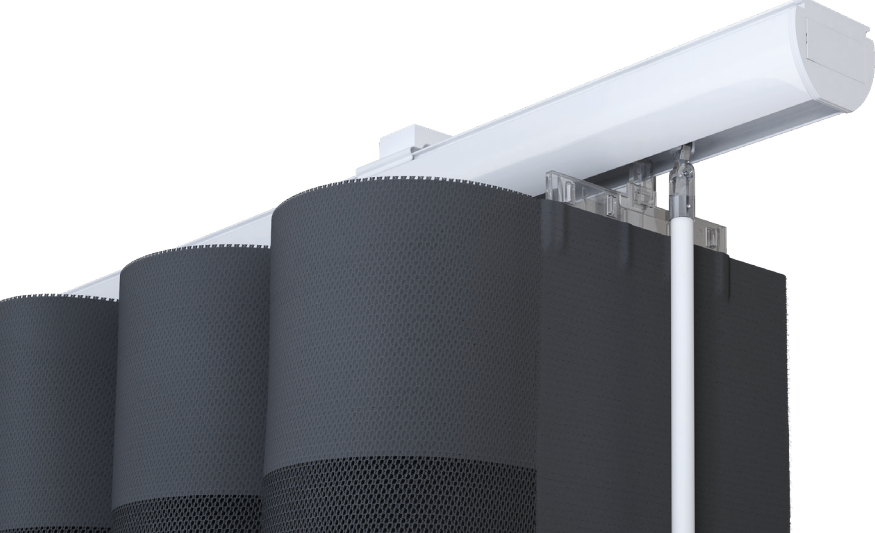

SINGLE OPERATION

ROD OPERATION

The horizontal movement of the rod allows the blind to be opened and closed, while rotating the handle makes it possible to orient the vertical bands and regulate the light. The rod is available in white, grey and black.

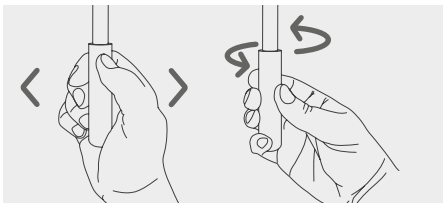

OPERATING ROD
Horizontal movement: opens and closes the blind.
Vertical rotation: moves the vertical bands.


BLISH LINE




VERSION WITH OPERATION

CORD AND CHAIN

The chain makes it possible to orient the vertical bands, adjusting the passage of filtering or screening light. The cord controls the opening and closing of the blind.



CORD
Opens and closes the blind.




CHAIN
Moves the vertical bands.

VERSION WITH OPERATION

ROD - OPERATED

The horizontal movement of the rod allows the blind to be opened and closed, while rotating the handle makes it possible to orient the vertical bands and regulate the light. The rod is available in white, grey and black.

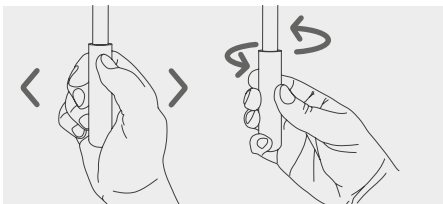

OPERATING ROD
Horizontal movement: opens and closes the blind.
Vertical rotation: moves the vertical bands.

BLISH | TECHNICAL FEATURES



10% FILTERING FABRIC

View of the outside




95% FILTERING FABRIC

Soft diffused light enters, but the outside is not visible.


THE BLIND WITH TWO FABRICS

Blish is the innovative blind with a unique design that combines perfectly two fabrics, which are adjusted at will to provide two levels of solar filtering. It is the ideal solution for any type of environment, thanks to its versatility and easy operation.





- 10% FILTERING FABRIC
- 95% FILTERING FABRIC

Il tessuto più filtrante è abbinato a uno meno filtrante, permettendo di modulare la luce attraverso l'orientamento delle fasce verticali, fino a ottenere una copertura filtrante del 95%. La tenda BLISH è disponibile con tre sistemi di movimentazione: a corda e catena, ad asta e a motore.



- 10% FILTERING FABRIC
- 95% FILTERING FABRIC

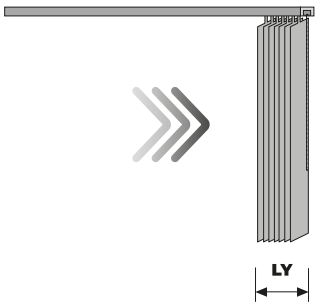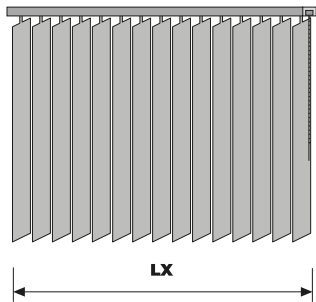

Child Safety
EN13120

OPENING AND STACKING

The stacking and opening table provides the dimensions of the blind both in open and closed position (LX), corresponding to the useful width of the opening, and in stacked position (LY), which represents the lateral stacking dimension of the bands once collected.

According to the overall width of the blind (LX), the table indicates the corresponding LY value, allowing the space required for the vertical bands to stack on the control side to be calculated accurately.

CONTROL-SIDE STACKING – RIGHT SIDE WITH STACKING DIMENSIONS (MEASUREMENTS IN CM)					
WIDTH LX	100	200	300	400	450
WIDTH LY	15	30	45	60	75

NOTES: In the case of rod operation, one rod is provided for each stacking side.