


DOUBLE LINE

MAXIMUM DIMENSIONS - W230 X H270 CM


STANDARD

BRACKET: White painted metal with PVC side cover. 6060 alloy aluminium tube, 43 mm diameter.
HEADBOX: Profile for ceiling fixing.
CHAIN: Continuous loop white PVC.
PVC ACCESSORIES: WHITE; Black and grey available on request.
OPERATION: Right-hand side.

CEILING MOUNTING




SIDE VIEW
Ceiling fixing

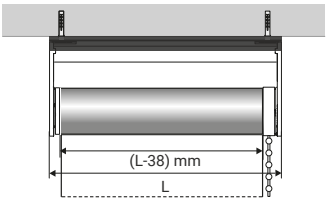


FRONT VIEW
The fabric width is 38 mm less than the requested width.

CENTRAL BRACKET FOR 2 BLINDS


Fabric deduction:
SUBTRACT 41 mm for each of the 2 blinds.

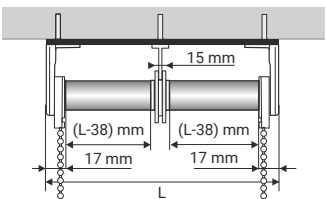


FABRIC DROP DIRECTION



OUTSIDE THE ROOM
STANDARD, ceiling fixing




INSIDE THE ROOM
ON REQUEST, ceiling fixing




HEADBOX FIXING

Clip fixing, dimensions
L68x20x10 mm



TUBE INSERT (FIG.1)

For roller with PVC insert
welded to the fabric



STANDARD BOTTOM BAR

For all double line blinds



AVAILABLE FINISHES



Glossy white
RAL 9010



Black
RAL 9005




Satin
aluminium

NOTES

- Wall fixing requires anchorage brackets, see GIOVY model in ROLLER BLIND OPTIONAL ACCESSORIES PAGE 125;
- All fabrics are welded with the PVC insert and slide-fitted into the ogive tube (FIG.1);
- Wall plugs and screws not included.

HEADBOX VALANCE DETAIL (OPTIONAL PAGE 125)

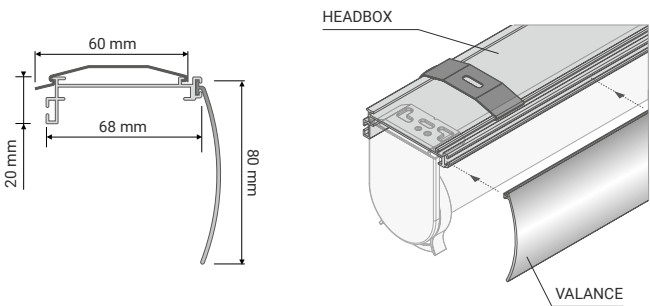

OPTIONAL

IBOX TECHNICAL DATA SHEET - PAGE 100
MOTORS AND CONTROLLERS - PAGES 119-123
ROLLER BLIND OPTIONAL ACCESSORIES - PAGE 125

CHAIN LENGTHS

- From 0 to 200 cm: chain length is 130 cm continuous loop;
 - From 201 to 300 cm: chain length is 200 cm continuous loop;
 - From 301 to 350 cm: chain length is 250 cm continuous loop;
 - From 351 to 450 cm: chain length is 300 cm continuous loop.
- NOTE:** For custom chain lengths, only metal chain is available.